



We will make it easy for you to make a purchase decision by selecting from our extensive range of products marked with the following symbols.



Products marked with this sign are best selling products. For our business partners it is a guarantee of sales success and customer satisfaction.



Products marked with this trademark are highly competitive, feature more functionality, or exceptionally attractive price / quality ratio. Our trading partners give it more arguments in relation to the customer and ensure increased sales.



Our new products are those that respond to your current market needs so that your offer is even more diversified and competitive.



ECB-S is the largest international security product certification body, bringing together the most prestigious research institutes in Europe. Possession of the ECB-S certificate is confirmation of the highest standards of protection.



The patented filling formula gives you less weight while maintaining the highest safety standards. Reduced weight is an advantage for transportation and assembly.




Patented, special type of Ultra High Performance Concrete, with increased hardness compared to traditional concrete, comparable to solid stone.



Quality without compromise. Products bearing this mark are characterized by the highest standards of manufacture and the most up-to-date technologies and materials.



Laser cutting technology used in our production process allows for greater precision of the structure.




The products marked with this sign feature a multi-layer reinforced door and wall construction. This is the «safe in safe» effect.



Multilayered construction. In products marked with this sign the walls consist of alternating layers of sheet metal and special reinforced fillings.

# FIRE RESISTANT SAFES

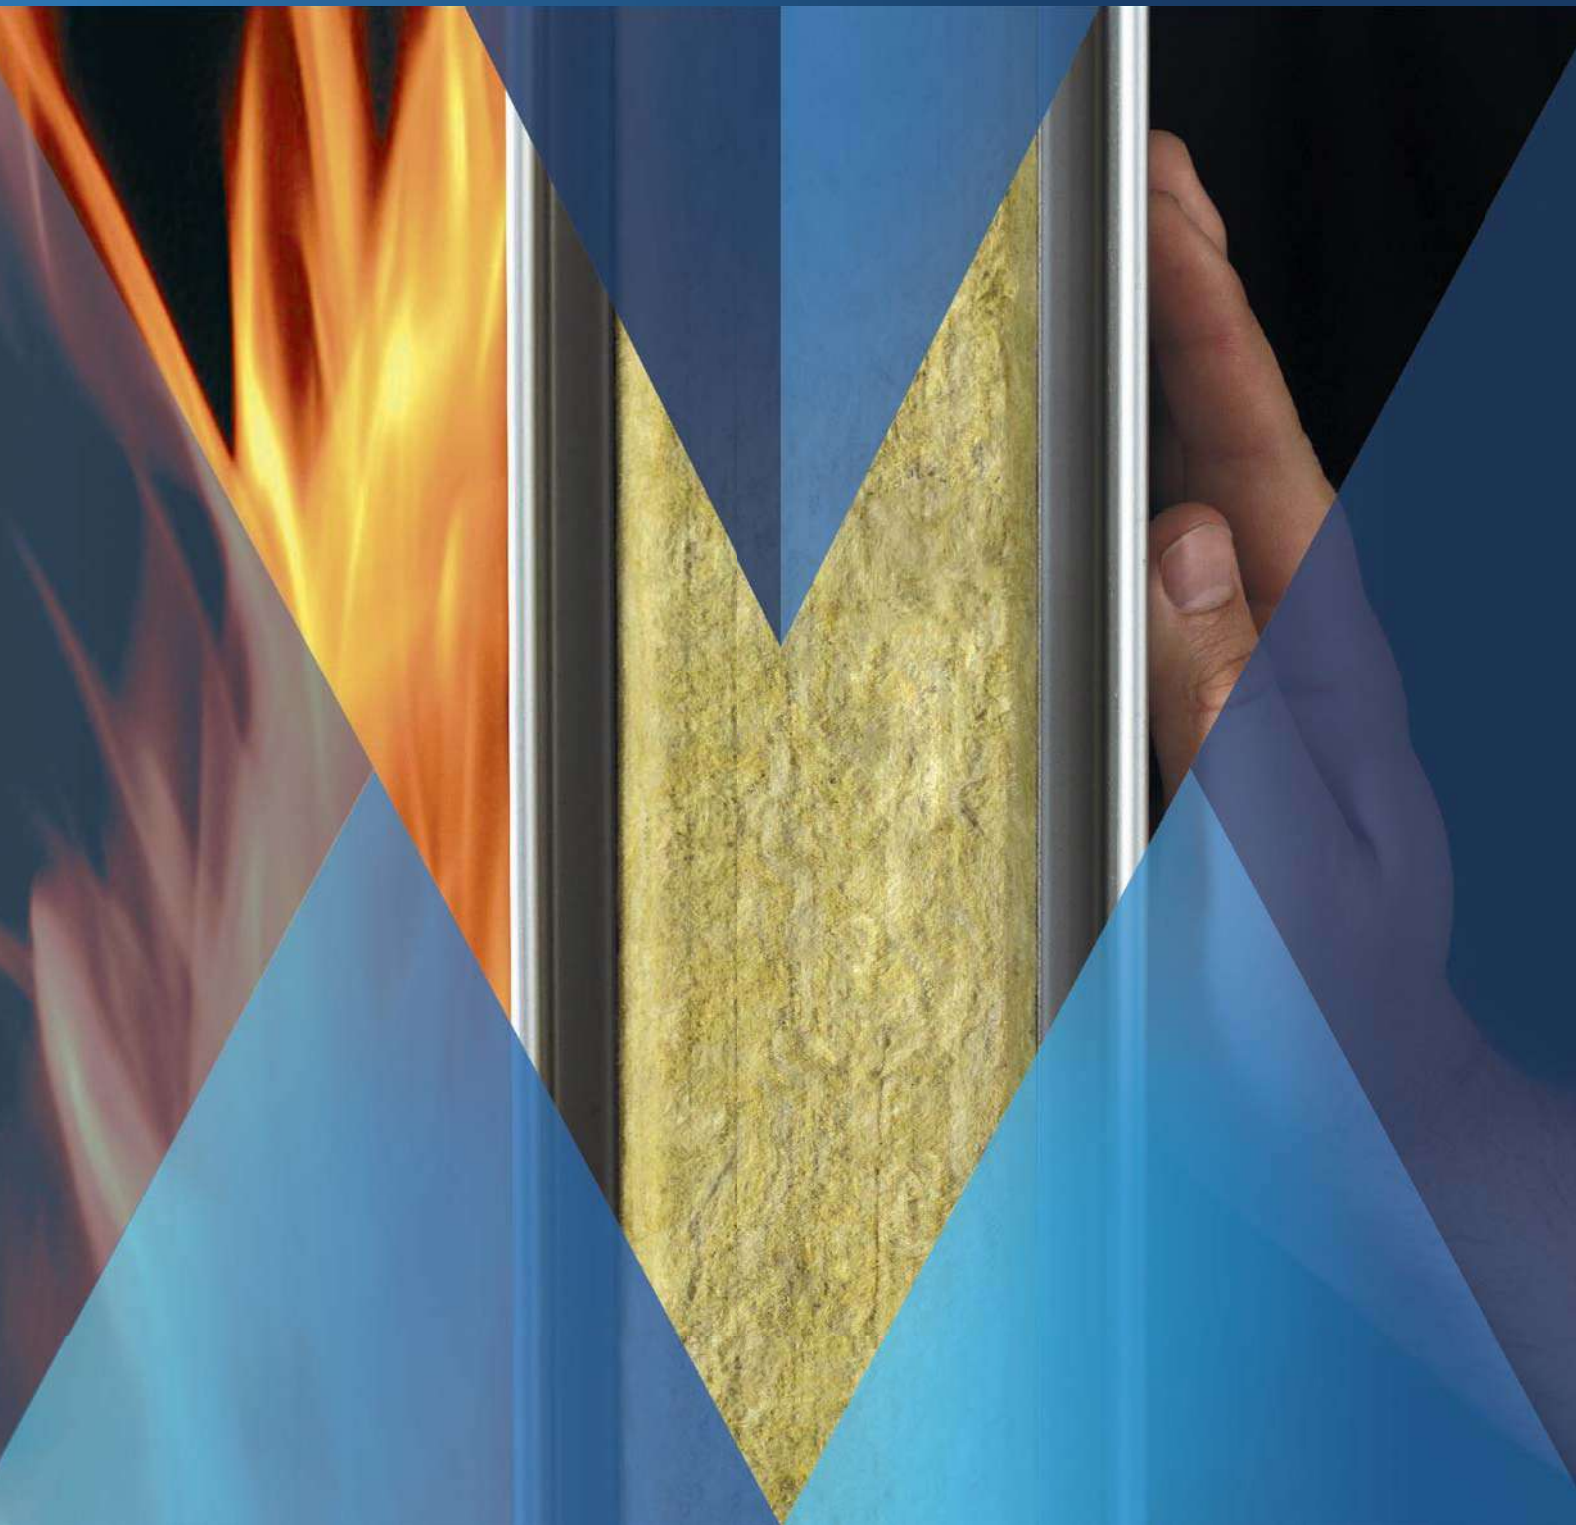

# Fire Resistant Filing Cabinets

**VALBERG**

series: **FC**  
grade: **LFS 60P**



Optional wheels available

Model								
FC 1	487	480	653	250	326	512	1	78
FC 2	825	545	653	250	390	500	2	110
FC 3	1163	545	653	250	390	500	3	150
FC 4	1500	545	653	250	390	500	4	210



Key lock




Digital lock



Combination lock

The outer depth is given without the handle and the lock.  
The outer height is given without wheels. The height with wheels is +20 mm

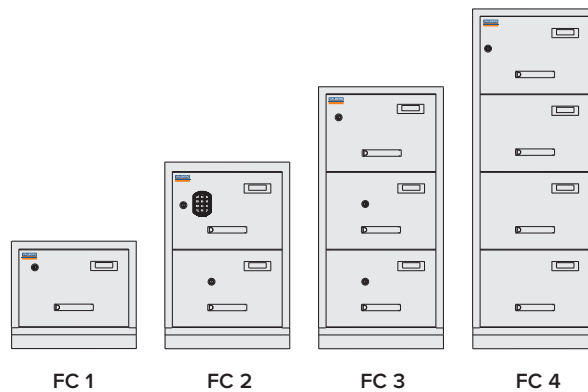


- Fire resistance – 1 hour LFS 60P according to EN 15659.
- Drawer capacity – 50 kg.
- Drawers adjustable for A4 and Foolscap files.
- Electrostatic powder coating is applied to all sides including the bottom. The finish is scratch-resistant providing a lifetime quality appearance.
- Individual drawer locking allows the user to leave one or more drawers unlocked with the push lock in the locked position.
- All filing cabinets are installed with a central high security key or digital push lock. Additional drawers can be installed with key, digital or mechanical combination locks. Key lock made in Germany (Euro Locks).
- Anti-tilt device.
- Handles and label holders are made of rubber coated plastic (soft touch).
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

# Fire Resistant Safes

**VALBERG**

series: **FRS**  
grade: **LFS 60P**

YOU GOT MORE



FRS 30



FRS 133



Optional wheels available


Model										KG	Vol
FRS 30	296	430	365	188	326	236	-	tray	31	15	
FRS 32	315	445	425	207	341	296	-	tray	38	21	
FRS 49	490	361	425	382	257	296	-	1+tray	46	29	
FRS 51	510	445	425	402	341	296	-	1+tray	54	41	
FRS 66	653	485	450	467	346	301	85x343	1	75	49	
FRS 67	713	485	450	527	346	301	85x343	1	86	49	
FRS 75	792	485	450	607	346	301	85x343	1	103	64/8	
FRS 93	972	565	450	786	426	301	85x423	2	138	98/10	
FRS 120	1249	711	580	1034	546	418	135x515	2	290	236/26	
FRS 133	1363	711	580	1170	546	418	135x515	2	332	267/26	
FRS 165	1700	711	580	1487	546	418	135x515	3	390	340/26	




Digital lock + Key lock



Digital lock + Thumbturn




Digital lock + Key lock



Digital lock + Handle

The outer depth is given without the handle and the lock.

The outer height is given without wheels. The height with wheels is +20 mm

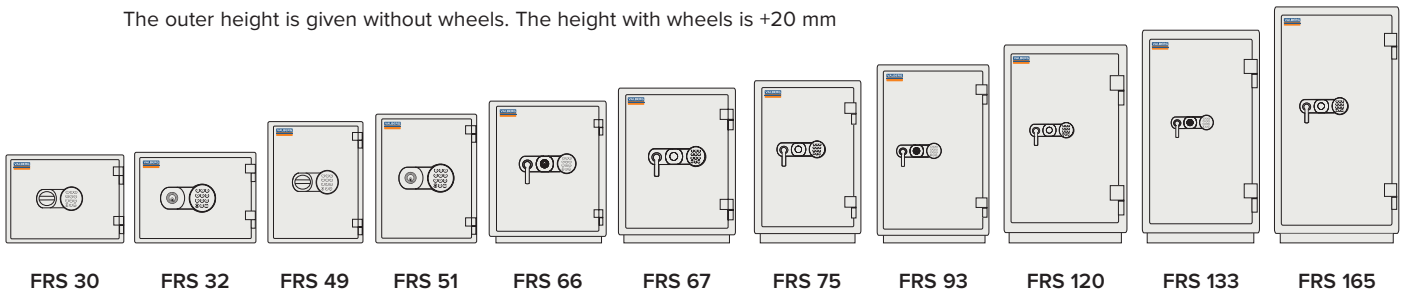

FRS 30

FRS 32

FRS 49

FRS 51

FRS 66

FRS 67

FRS 75

FRS 93

FRS 120

FRS 133

FRS 165

- Fire resistance – LFS 60P according to EN 15659.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Dead bolts on hinge side
- The thickness of wall 50 mm.

- The thickness of door 95 mm.
- Pull out tray or drawer included.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

# Innovative solutions for series FRS

VALBERG


series: **FRS**



Dead bolts  
on hinge side



Pull out tray

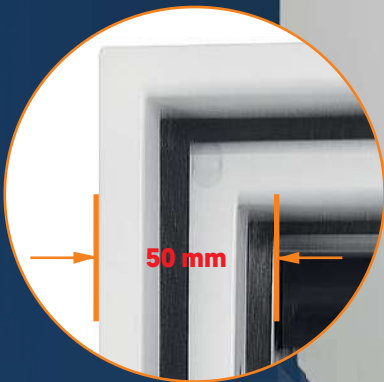

Multilayered wall  
structure, thickness  
of 50 mm



Pull out drawer



Multilayered door  
structure, thickness  
of 95 mm



New



FRS **PLUS** Series

# Fire Resistant Safes

**VALBERG**

series: **FRS PLUS**  
grade: **NT FIRE 90P**


YOU GOT MORE

New

Laser Cut Effect

MULTI LAYER SYSTEM

SP Certified



FRS 32 PLUS



FRS 51 PLUS

Model										
FRS 30 PLUS	300	405	355	190	305	219	tray	28	13	
FRS 32 PLUS	315	430	430	205	330	296	tray	37	20	
FRS 36 PLUS	360	480	430	250	380	294	tray	48	28	
FRS 49 PLUS	490	350	430	380	250	294	1+tray	48	28	
FRS 51 PLUS	490	430	430	380	330	295	1+tray	50	37	


The outer depth is given without the handle and the lock.

Digital lock + Key lock


Digital lock + Thumbturn

Digital lock + Key lock


Digital lock + Handle




FRS 30




FRS 32



FRS 36



FRS 49



FRS 51

- Fire resistance – NT FIRE 90P
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Modern design
- Dead bolts on hinge side
- The thickness of wall 50 mm.
- The thickness of door 85 mm.
- Pull out tray included.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).





# PROMET

**Feel Safe** ■

60, Rozova dolina str.,  
Kazanlak, Bulgaria, 6100  
Phone / Fax: +359 (4) 316-28-43  
[www.promet-safe.com](http://www.promet-safe.com)