

# PROMET

Feel Safe ■

## PRODUCT CATALOGUE

**BOOS.GR**

262, Mesogeion Ave.  
PC 155-62 Holargos, Greece  
T. +30 210 654 9590  
E. info@boos.gr

We will make it easy for you to make a purchase decision by selecting from our extensive range of products marked with the following symbols.



Products marked with this sign are best selling products. For our business partners it is a guarantee of sales success and customer satisfaction.



Products marked with this trademark are highly competitive, feature more functionality, or exceptionally attractive price / quality ratio. Our trading partners give it more arguments in relation to the customer and ensure increased sales.



Our new products are those that respond to your current market needs so that your offer is even more diversified and competitive.



ECB-S is the largest international security product certification body, bringing together the most prestigious research institutes in Europe. Possession of the ECB-S certificate is confirmation of the highest standards of protection.



The patented filling formula gives you less weight while maintaining the highest safety standards. Reduced weight is an advantage for transportation and assembly.




Patented, special type of Ultra High Performance Concrete, with increased hardness compared to traditional concrete, comparable to solid stone.



Quality without compromise. Products bearing this mark are characterized by the highest standards of manufacture and the most up-to-date technologies and materials.



Laser cutting technology used in our production process allows for greater precision of the structure.



The products marked with this sign feature a multi-layer reinforced door and wall construction. This is the «safe in safe» effect.



Multilayered construction. In products marked with this sign the walls consist of alternating layers of sheet metal and special reinforced fillings.

# PROMET Worldwide

## Markets

- Austria

Azerbaijan

Australia

Bahrain

Belarus

Belgium

Bosnia and Herzegovina

Croatia

Denmark

Egypt

Estonia

Ethiopia

Finland
- France

Germany

Georgia

Greece

Hong-Kong

Iran

Iraq

Israel

Jordan

Kuwait

Kyrgyzstan

Latvia

Lithuania

Lebanon
- Libya

Macao

Macedonia

Morocco

Netherlands

Nigeria

Oman

Palestine

Poland

Portugal

Qatar

Romania

Russia

Serbia
- Sudan

South Korea

Sweden

Spain

Switzerland

Tajikistan

Trinidad

Turkmenistan

Tunis

UAE

Ukraine

UK

USA

## Our history

1991

April

Start promoting first sales of safes.

1993

November

Begin expansion of our distribution network.

2000

April

Launch of our first manufacturing facility.

2001

September

Our quality management program is certified to ISO 9001.

2008


July

Launch of our second and third manufacturing facilities.

## Quality

Our approach - provide durable products that meet the highest expectations of our buyers by manufacturing our products to the highest standards.



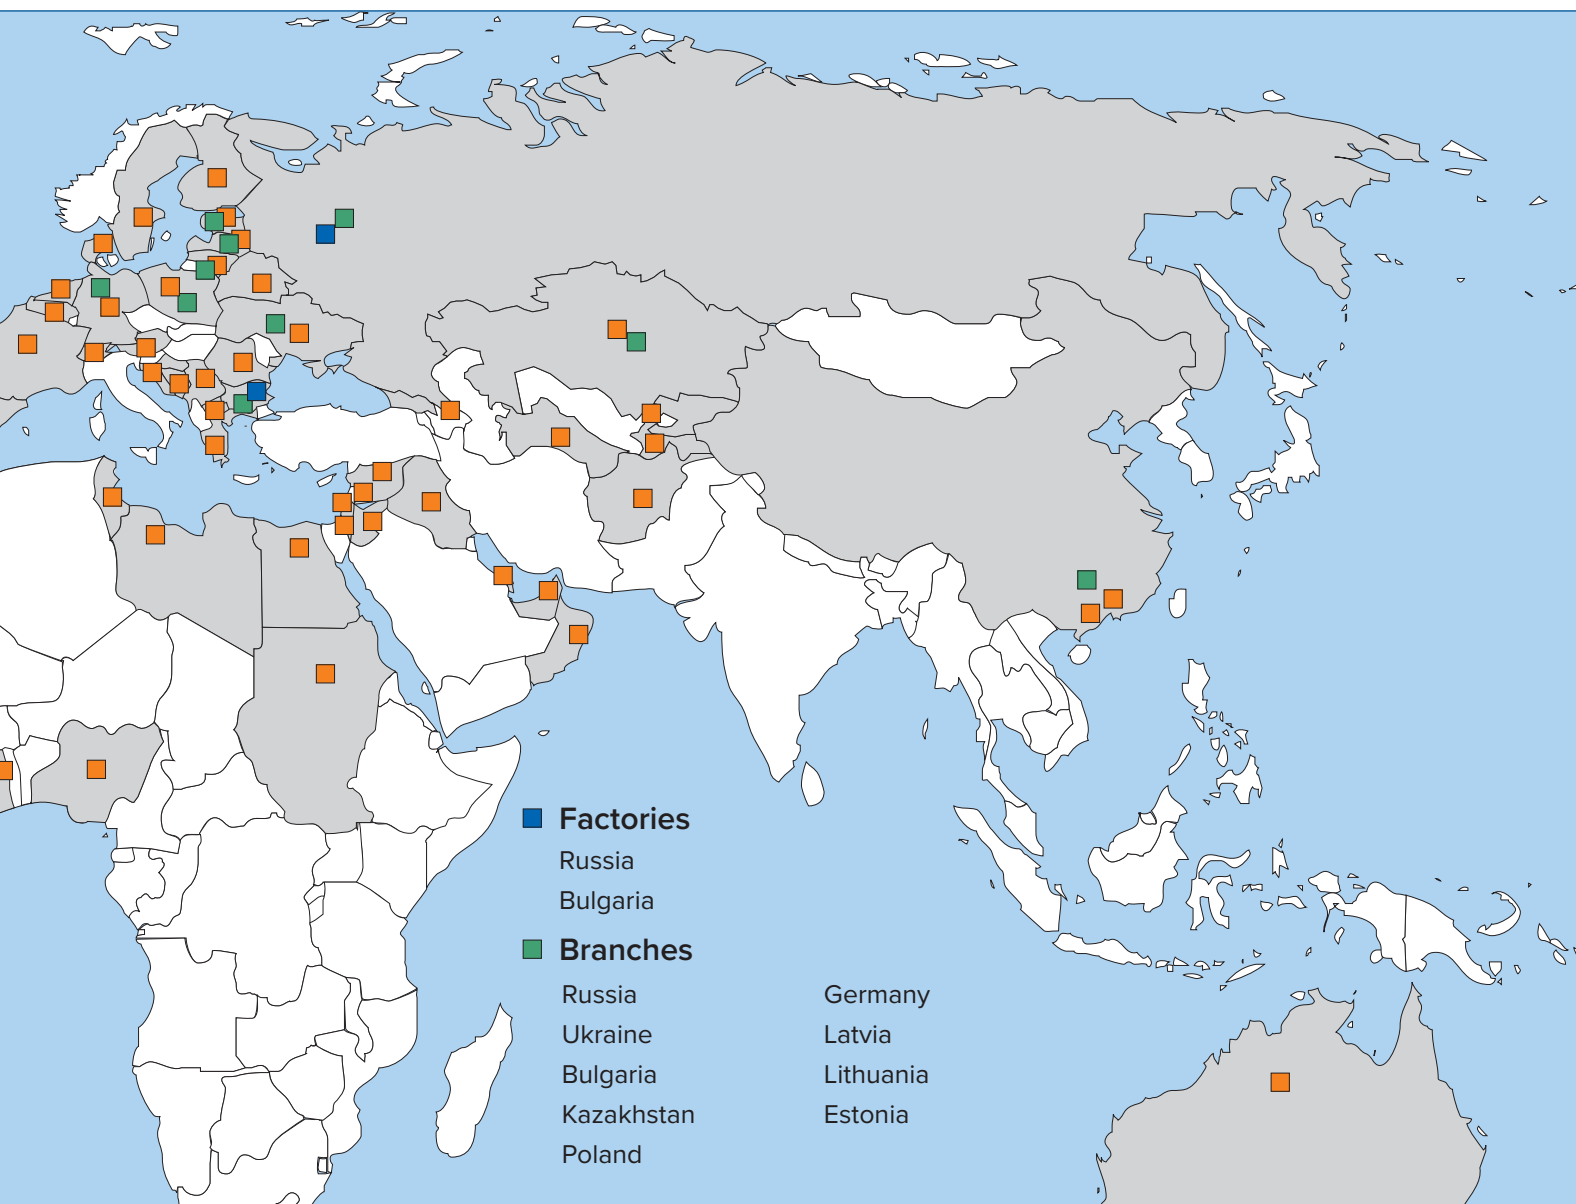

**2009**

**August**

First line of safes certified to ECBS standards.

**2013**

**December**

13 safe lines certified to ECBS standards.

**2014**

**November**

Manufacture of own certified digital locks and boltwork

**2016**

**25 Year Anniversary**

Branches in Baltic Region, Bulgaria, Russia, Germany, Kazakhstan, Poland and Ukraine.

As of september 2001 our quality managment system is certified to the ISO 9001. One of the leading certification organizations in the world, Det Norske Veritas, is acting as our certifying body.





## Manufacturing



Group of companies Promet is one of the leading safe manufacturers. The Group has three factories including the main export plant located in the European Union, the Republic of Bulgaria.



The production philosophy is based on the management principles of “lean manufacturing”.



The plants implement measures allowing optimized environmental use and minimized environmental pollution resulting from the production.




The plants are equipped with the most advanced metal processing equipment, which is not only sufficiently effective and suitable for production on a large scale, but also flexible and adjustable for manufacturing of a wide range of items and switching quickly among various production types.





## Equipment

- Automatic punching lines  
PIVATIC
- Laser cutting systems  
BYSTRONIC
- Punch presses  
FINNPOWER, AMADA
- Bending machines  
FINNPOWER, AMADA
- Welding robots  
MOTOMAN
- Powder coating  
GEMA

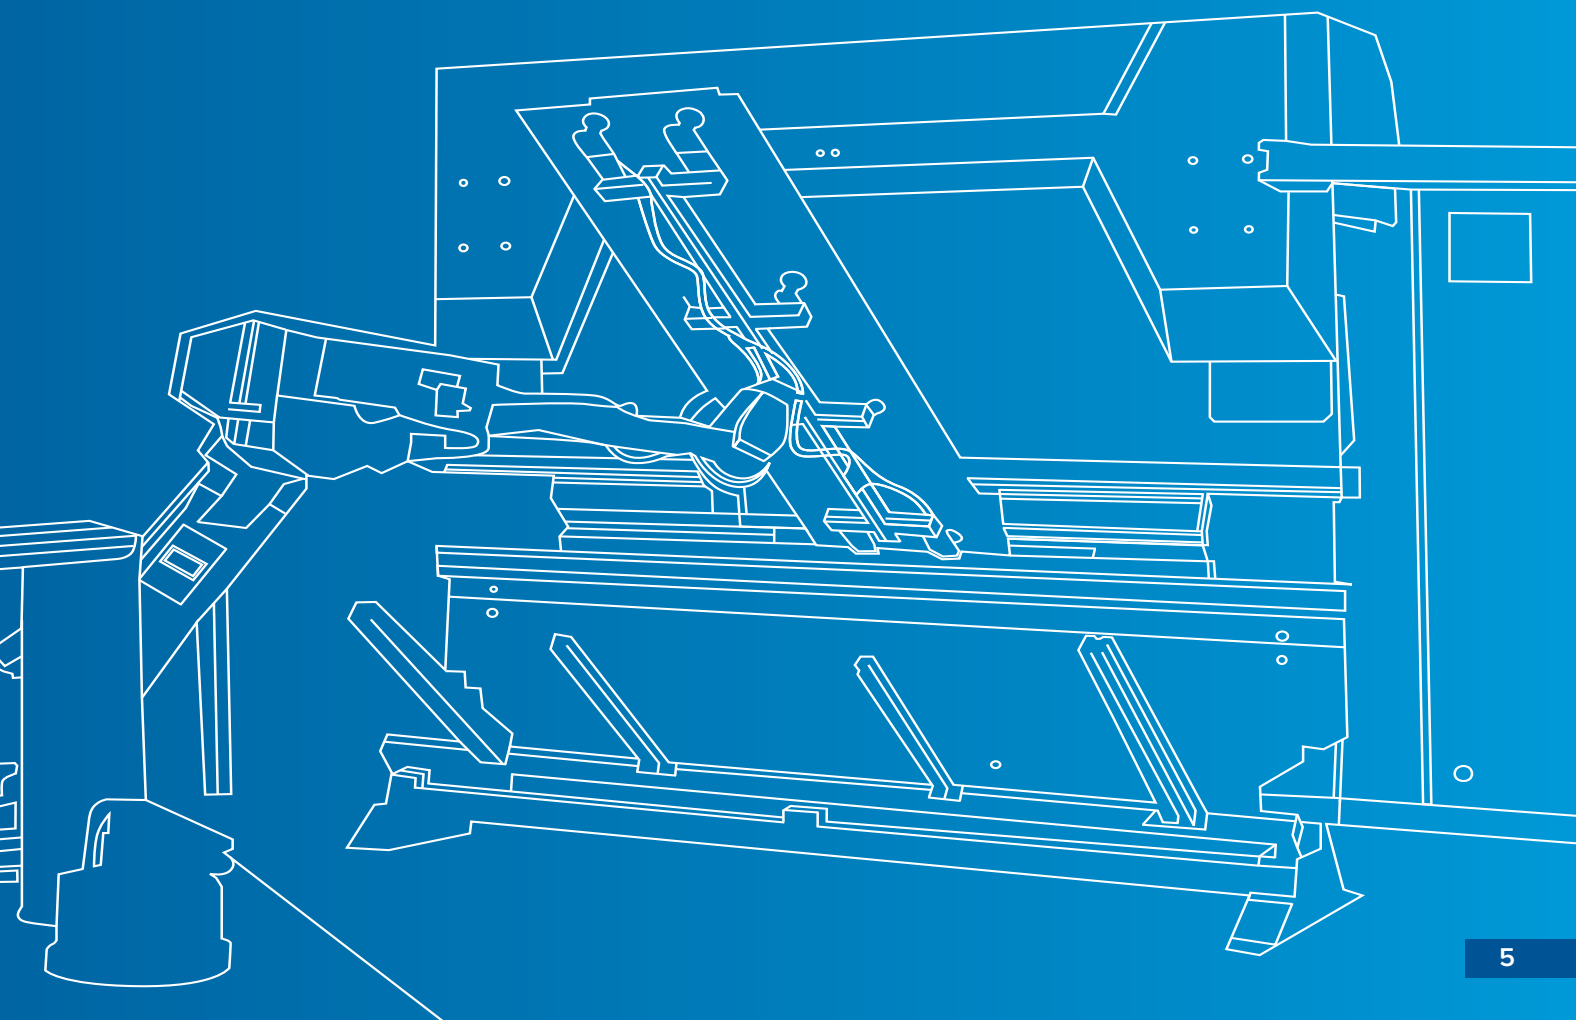

# COMMERCIAL SAFES



# Commercial Safes

series: **Granit**

grade: **I, LFS 30 P**

YOU GOT MORE

LASER  
Cut  
EFFECT

MULTI  
LAYER SYSTEM

GRADE I  
ECB-S  
certified

LFS 30 P  
ECB-S  
certified

BEST  
SELLER



GRANIT 90



GRANIT 65

Model										
Granit 3450	340	500	345	262	424	216	1	6	93	24
Granit 4450	440	500	432	362	424	302	1	6	128	46
Granit 46	460	440	430	382	364	300	1	4	119	42
Granit 5450	540	500	432	462	424	302	1	6	149	59
Granit 6465	638	650	550	550	574	420	2	8	233	135
Granit 65	655	440	430	574	364	300	1	6	155	63
Granit 8465	840	650	550	782	574	420	2	8	289	189
Granit 90	900	440	430	822	364	300	2	9	205	90
Granit 1065*	1041	650	554	963	574	424	2	9	345	234
Granit 1265*	1241	650	554	1163	574	424	2	10	426	283



Key lock  
Kaba 71111



Digital lock  
Grade B (PS-600)

The outer depth is given without the handle and the lock.


\* Grade 1 only (no certified fire protection)




GRANIT  
3450




GRANIT  
4450 EL



GRANIT  
46




GRANIT  
5450 EL



GRANIT  
6465




GRANIT  
65 EL




GRANIT  
8465



GRANIT  
90 EL



GRANIT  
1065




GRANIT  
1265 EL

- Burglary resistance – EN 1143-1, Grade I.
- Fire resistance – LFS 30P according to EN 15659.
- The safe body and door are manufactured with two inter-welded walls that are filled with concrete.
- Three way locking bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).



# Commercial Safes

series: **Garant**  
grade: **I, LFS 60P**



GARANT 67



GARANT 46

Model										
Garant 46	490	480	455	330	332	295	1	8	106	33
Garant 67	670	480	455	510	332	295	1	8	136	49
Garant 75	750	555	547	590	407	388	1	9	193	93
Garant 95	980	545	455	820	400	295	1	9	205	94
Garant 110	1100	555	547	940	407	388	2	10	287	148
Garant 133	1336	701	580	1142	527	388	2	10	413	233
Garant 165	1652	701	580	1459	527	382	3	11	501	298



Key lock  
Kaba 71111




Digital lock  
Grade B (PS-600)


The outer depth is given without the handle and the lock.




GARANT 46




GARANT 67




GARANT 75




GARANT 95



GARANT 110



GARANT 133



GARANT 165

- Burglary resistance – EN 1143-1, Grade I.
- Fire resistance – LFS 60P according to EN 15659.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Thickness of door – 110 mm
- Thickness of walls – 80 mm
- Three way locking bolts. Double vertical bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

# Innovative solutions for series Garant

series: **Garant**

**VALBERG**

Dead bolts  
on hinge side



Double  
vertical bolts



Reinforced  
frame.



Multilayered wall  
structure, thickness  
of 80 mm



Multilayered door  
structure, thickness  
of 110 mm



**MULTI**  
LAYER SYSTEM


YOU  GOT MORE

# Commercial Safes

series: **Bastion M**  
grade: **II, LFS 30 P**



MULTI  
LAYER SYSTEM



BASTION M 46

Model										
Bastion-M 46	460	470	470	333	355	319	1	8	179	38
Bastion-M 50	500	510	510	373	395	359	1	8	220	53
Bastion-M 67	670	510	510	544	395	359	1	8	279	77
Bastion-M 60	610	680	510	483	565	359	1	8	305	98
Bastion-M 80	810	680	510	684	565	359	2	9	382	139
Bastion-M 99	990	510	510	864	395	359	2	9	370	123
Bastion-M 1068	1010	680	510	883	565	359	2	9	419	179
Bastion-M 1368	1320	680	510	1193	565	359	3	10	572	242
Bastion-M 1668	1660	680	510	1533	565	359	4	11	755	311




Key lock  
Kaba 7111



Digital lock  
Grade B (PS-600)

The outer depth is given without the handle and the lock.

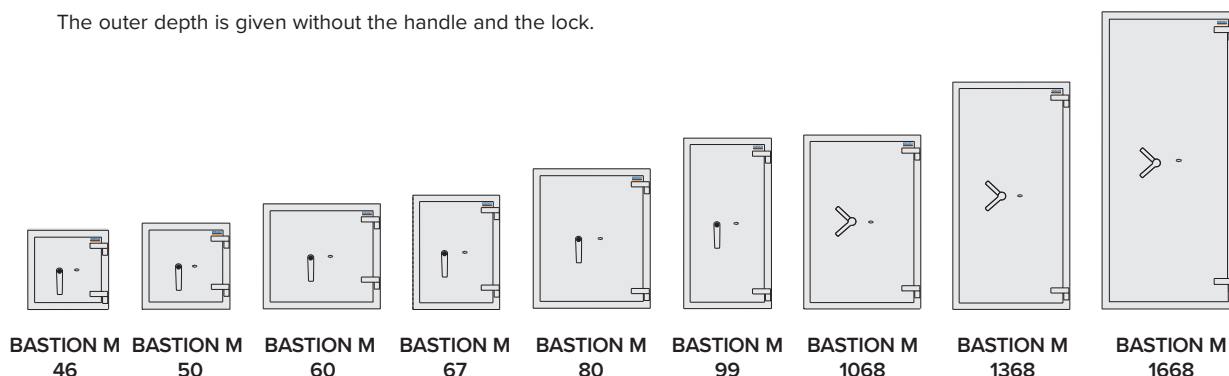

- Burglary resistance – EN 1143-1, Grade II.
- Fire resistance – LFS 30P according to EN 15659.
- Thickness of door – 92 mm.
- Thickness of walls – 58 mm.
- Patented, special type of Ultra High Performance Concrete
- Three way locking bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor and back wall.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).



Fort M Series




# Commercial Safes

**VALBERG**

series: **Fort M**

grade: **III, LFS 30 P**



FORT M 50



Model										
Fort M 50	500	510	510	373	395	327	1	8	228	48
Fort M 60	610	680	510	483	565	327	1	8	322	89
Fort M 67	670	510	510	544	395	327	1	8	281	70
Fort M 80	810	680	510	683	565	327	2	9	396	126
Fort M 99	990	510	510	863	395	327	2	9	398	111
Fort M 1068	1010	680	510	883	565	327	2	9	478	163
Fort M 1368	1320	680	510	1193	565	327	3	10	591	220
Fort M 1385	1320	850	510	1173	715	316	3	12	782	265
Fort M 1668	1660	680	510	1513	545	316	4	11	786	261
Fort M 1685	1660	850	510	1513	715	316	4	13	941	342




Key lock  
Kaba 71111



Digital lock  
Grade B (PS-600)

The outer depth is given without the handle and the lock.

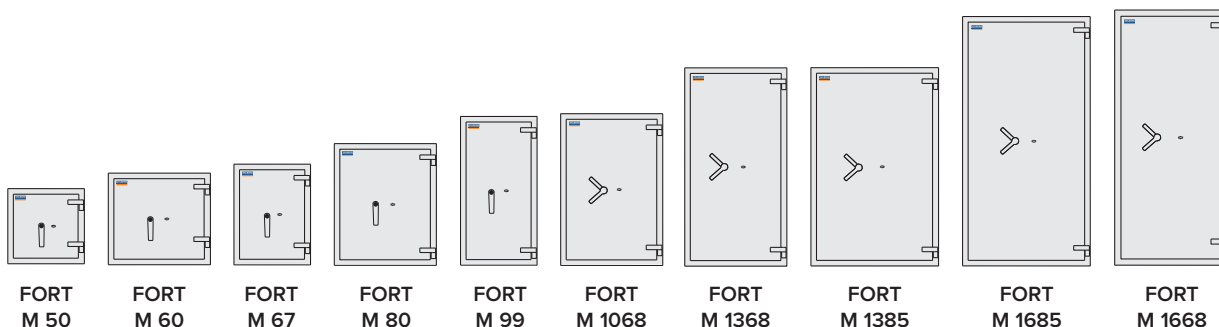

- Burglary resistance – EN 1143-1, Grade III.
- Fire resistance – LFS 30P according to EN 15659.
- Thickness of door – 125 mm.
- Thickness of walls – 58 mm.
- Patented, special type of Ultra High Performance Concrete
- Three way locking bolts.
- Integrated relocker with glass plate, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor and back wall.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).



# Commercial Safes

series: **Burgas**  
grade: **V, LFS 30 P**



BURGAS 67



Model										
Burgas 67	680	680	630	540	540	382	1	12	600	111
Burgas 85	840	680	680	700	540	432	1	12	695	163
Burgas 1061	1010	680	680	870	540	432	2	12	808	203
Burgas 1361	1320	680	680	1180	540	432	3	14	1025	275
Burgas 1561	1510	680	680	1370	540	432	3	14	1152	320




Key lock  
Kaba 70040 +  
Kaba 70040



Key lock+Digital lock  
Kaba 70040 +  
Grade B (PS-600)

The outer depth is given without the handle and the lock.

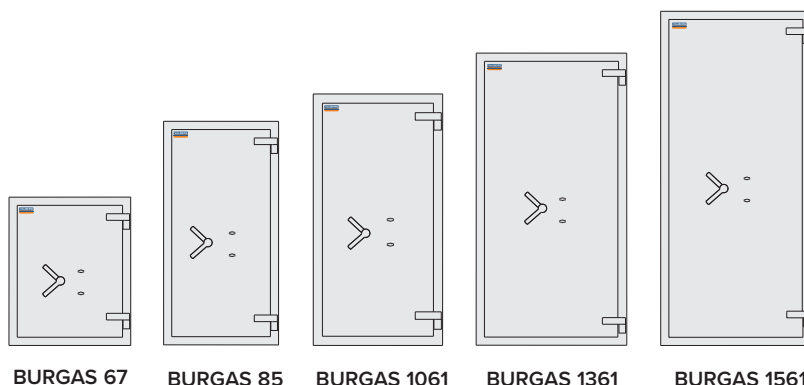

BURGAS 67

BURGAS 85

BURGAS 1061

BURGAS 1361

BURGAS 1561

- Burglary resistance – EN 1143-1, Grade V.
- Fire resistance – LFS 30P according to EN 15659.
- Thickness of door – 166 mm.
- Thickness of walls – 70 mm.
- Integrated relocker with glass plate, lock secured from drill attacks.
- Three way locking bolts.
- Standard delivery with 2 double-bit high security key locks with two keys.
- Anchoring to the floor and back wall.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

# PRIVATE SAFES



# Private Safes

series: **BRF**

grade: **S2, LFS 30P**

**VALBERG**

YOU GOT MORE


LASER  
cut  
EFFECT

MULTI  
LAYER SYSTEM

GRADE S2  
ECB-S  
certified

LFS 30 P  
ECB-S  
certified

**BEST  
SELLER**



BRF 46




BRF 32

Model										
BRF-30	300	427	385	170	316	235	1	4	49	13
BRF-32	315	445	450	185	335	300	1	4	57	19
BRF-46	460	440	450	330	330	300	1	4	71	32
BRF-49	490	360	450	360	249	300	1	4	66	27
BRF-67	670	440	450	540	330	300	1	4	96	53
BRF-95	950	440	450	822	330	300	2	6	127	81




Key lock  
Kaba 74046




Digital lock  
Grade A (PS-300)


The outer depth is given without the handle and the lock.




BRF-30




BRF-32




BRF-46



BRF-49



BRF-67



BRF-95

- Burglary resistance – S2 according to EN 14450.
- Fire resistance – LFS 30P according to EN 15659.
- Thickness of door - 95 mm.
- Thickness of walls - 55 mm.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Three way locking bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

# Innovative solutions for series BRF

VALBERG

series: **BRF**



Dead bolts  
on hinge side



Vertical bolts



Multilayered wall  
structure, thickness  
of 55 mm



Thickness  
of door 95 mm



**MULTI**  
LAYER SYSTEM

YOU  GOT MORE

# Private Safes

series: **ASK**

grade: **I**

**VALBERG**

YOU GOT MORE

Laser  
Cut  
Effect

MULTI  
LAYER  
SYSTEM



ASK 90T




ASK 46

Model										
ASK - 20*	200	260	180	138	212	100	1	4	21	3
ASK - 25*	250	360	310	194	312	228	1	4	44	14
ASK - 30	300	440	380	244	392	298	1	4	65	29
ASK - 46	460	440	380	404	392	298	1	4	90	48
ASK - 67T	670	440	380	484	392	298	1	4	122	56/15
ASK - 90T	900	440	380	714	392	298	1	6	154	84/15



Key lock  
Kaba 71111



Digital lock  
Grade A (PS-300)

The outer depth is given without the handle and the lock.


\* No electronic lock available.




ASK 20




ASK 25




ASK 30



ASK 46



ASK 67T



ASK 90T

- Burglary resistance – EN 1143-1 IMP, Grade I.
- Increased resistance to drilling by using the front casing from solid steel - 10mm.
- Thickness of walls - 24mm.
- Three way locking bolts.
- Curved shape door vault.
- Integrated relocker, lock secured from drill attacks.


- Multilayered wall construction.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor and back wall (except ASK 67 and ASK 90)
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).



# Innovative solutions for series ASK

VALBERG


Thanks to the laser, it is possible to achieve the arched shape of the door vault. The most vulnerable place of the safe, the first to be exposed by the thief is the place where the door is connected to the body. The rounded shape of the door makes it difficult to effectively undermine the frame with a crowbar or other mechanical tool.

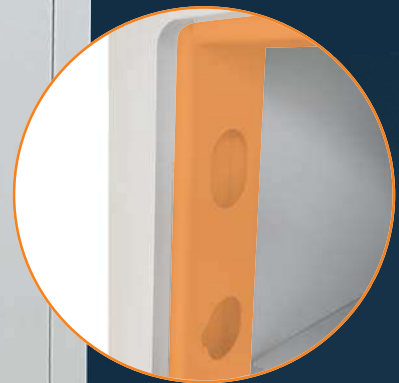

Reinforced frame.



Three way locking bolts.

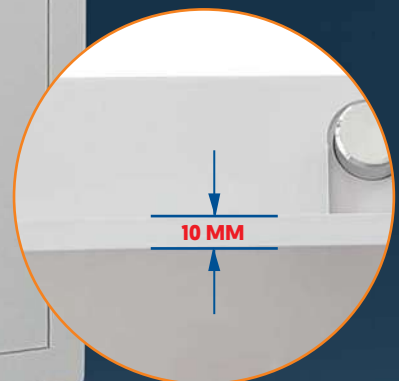

Increased resistance to drilling through the use of the front shell from solid steel 10 mm

laser  
cut  
effect

YOU GOT MORE

# DOUBLE DOOR SAFES



# Double door Safes

series: **FSB**

grade: **S2, LFS 60P**


YOU GOT MORE



MULTI  
LAYER SYSTEM



FSB 1993



Model										
FSB 12130	1200	1250	585	1030	1110	390	2	7	440	445
FSB 19130	1950	1250	585	1785	1110	390	4	9	650	773
FSB 1993	1950	940	585	1760	801	392	4	9	558	553




Key lock  
Kaba 7111




Digital lock  
Grade B (PS-600)


The outer depth is given without the handle and the lock.



FSB 12130



FSB 1993



FSB 19130


- Burglary resistance – S2 according to EN 14450.
- Fire resistance – LFS 60P according to EN 15659.
- Thickness of door - 105 mm.
- Thickness of walls - 77 mm, rear wall – 51 mm.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Maximal shelf load – 40 kg
- Three way locking bolts.
- Accessories: Inner compartment, telescopic shelf, telescopic frame.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

# Double door Safes

series: **Garant**  
grade: **I, LFS 60P**



**MULTI**  
LAYER SYSTEM



GARANT 1993

Model										
Garant 1993	1950	940	585	1760	801	392	4	13	658	553


The outer depth is given without the handle and the lock.



Key lock  
Kaba 71111



Digital lock  
Grade B (PS-600)



GARANT 1993

- Burglary resistance – EN 1143-1, Grade I.
- Fire resistance – LFS 60P according to EN 15659.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Thickness of door – 110 mm
- Thickness of walls – 80 mm
- Accessories: Inner compartment, telescopic shelf, telescopic frame.
- Three way locking bolts. Double vertical bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Maximal shelf load – 40 kg
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).



# DEPOSIT SAFES





# Deposit Safes

series: **ASD**

grade: **S1**

**VALBERG**



ASD 19 EL




ASD 32 EL

Model											
ASD 19	489	342	381	464	330	317	218x110x60	31	50		
ASD 32	812	419	427	796	407	336	296x110x60	55	155		




Key lock  
Kaba 74046




Digital lock  
Grade A (PS-300)

The outer depth is given without the handle and the lock.



ASD 19



ASD 32

- Burglary resistance – Grade S1 according to EN 14450.
- Doors secured with solid steel plate.
- Single wall body.
- Three way locking bolts.
- Anti-fishing protection.
- Standard delivery with double-bit high security key lock with two keys.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).



**PROMET**  
**Feel Safe** ■

60, Rozova dolina str.,  
Kazanlak, Bulgaria, 6100  
Phone / Fax: +359 (4) 316-28-43  
[www.promet-safe.com](http://www.promet-safe.com)