



BOOS




[ Safes ]

BOOS.GR

262, Mesogeion Ave.  
PC 155 62 Holargos, Greece  
T. +30 210 654 9590  
E. info@boos.gr

[www.wertheim.at](http://www.wertheim.at)



 EN1143-1  
Burglary protection

 VdS  
Grade I


 ECB-S  
Grade I

 VSO  
Class EN 1

 A2P  
Class I E

 DIN  
4102 (light fire protection)

 Domestic insurable  
up to EUR 65.000

 Commercial insurable  
up to EUR 20.000

Insured amounts  
page 04

Fig. Safe AG05, hinge right  
E-Lock M-Locks EM3520, 1 shelf

Model	Outside dimensions h x w x d (mm)	Inside dimensions h x w x d (mm)	SH	Volume (l)	Weight (appr. kg)
AG03RK / AG03RE	280 x 400 x 312	230 x 350 x 180	1	14	60
AG05RK / AG05RE	280 x 450 x 442	230 x 400 x 310	1	29	85
AG10RK / AG10RE	395 x 450 x 442	345 x 400 x 310	1	43	105
AG15RK / AG15RE	565 x 450 x 442	515 x 400 x 310	1	64	130
AG20RK / AG20RE	735 x 450 x 442	685 x 400 x 310	1	85	155
AG25RK / AG25RE	905 x 450 x 442	855 x 400 x 310	2	106	185
AG30RK / AG30RE	1075 x 450 x 442	1025 x 400 x 310	2	127	215
AG35RK / AG35RE	1245 x 450 x 442	1195 x 400 x 310	3	148	240
AG40RK / AG40RE	1415 x 450 x 442	1365 x 400 x 310	3	169	270

SH = Shelf

## [ Safes ]

## [ Type AG ]

A distinctive feature of the AG series safes is their slim design. An external width of just 450 mm thanks to their space-saving wall construction allows an optimal utilisation with room for 5 file folders side by side (from AG10 up).

### [ Product information ]

Hinge	DIN right – model designation R option: DIN left
Door opening angle	180°
Body	double-walled, filled with high resistant barrier material
Door structure	triple-walled, filled with high resistant barrier material, internal boltwork protected by sheets of hardened steel to give extra anti-drill resistance
Locking mechanism	three-way moving boltwork with large steel bolts protected by additional emergency re-locks, continuous fixed full height bolt on the hinge side
Anchoring page 45, 46	prepared for floor and rear wall anchoring anchoring bolts and shields are supplied option: additional anchoring holes (customer specifies position)
Colour	inside and outside RAL 7037 dusty grey option: special colour according to RAL
Lock page 42, 43	model designation K – double-bit lock VdS class 1, Cawi 2 keys (95 mm) model designation E – electronic lock VdS class 2, M-Locks EM3520 option: other lock models
Equipment page 44	shelf (adjustable from AG10 up, height setting 85 mm) option: key rack (with option inspection window from AG 20 up) option (from AG10 up): additional shelf, inside locker, drawer, pull-out shelf
Accessories page 45	option: certified steel plinth to raise the level of the safe, fire protection door rebate seals, interior lighting, inspection window in boltwork door cover (from AG10 up)

### [ Equipment options ]



AG03

AG05

AG10

AG15

AG20


AG25

AG30

AG35

AG40



 EN1143-1  
Burglary protection

 VdS  
Grade I


 ECB-S  
Grade I

 VSO  
Class EN 1

 A2P  
Class I E

 DIN  
4102 (light fire protection)

 Domestic insurable  
up to EUR 65.000

 Commercial insurable  
up to EUR 20.000

Insured amounts  
page 04

## [ Safes ]

## [ Type AM ]

AM series safes offer lots of space and the option of additional locks to give dual control. All models are pre-fitted to enable connection to a burglar alarm system. Even the smallest model (AM10) has enough space to accommodate up to 6 file folders.

## [ Product information ]


Hinge	DIN right – model designation R option: DIN left
Door opening angle	180°
Body	double-walled, filled with high resistant barrier material
Door structure	triple-walled, filled with high resistant barrier material, internal boltwork protected by sheets of hardened steel to give extra anti-drill resistance
Locking mechanism	three-way moving boltwork with large steel bolts protected by additional emergency re-lockers, continuous fixed full height bolt on the hinge side
Anchoring page 45, 46	prepared for floor and rear wall anchoring anchoring bolts and shields are supplied option: additional anchoring holes (customer specifies position)
Alarm connection	VdS-certified cable channels to allow connection to a burglar alarm system
Colour	inside and outside RAL 7037 dusty grey option: special colour according to RAL
Lock page 42, 43	model designation K – double-bit lock VdS class 1, Cawi 2 keys (95 mm) model designation E – electronic lock VdS class 2, M-Locks EM3520 option: other lock models (primary lock or possible secondary locks)
Equipment page 44	shelf adjustable (height setting 85 mm) option: additional shelf, inside locker, drawer, pull-out shelf, key rack
Accessories page 45	option: certified steel plinth to raise the level of the safe, fire protection door rebate seals, alarm switch set, interior lighting

Fig. Safe AM25, hinge right  
K-Lock Cawi 2 keys (95 mm), 2 inside lockers, 1 shelf


Model	Outside dimensions h x w x d (mm)	Inside dimensions h x w x d (mm)	SH	Volume (l)	Weight (appr. kg)
AM10RK / AM10RE	395 x 545 x 442	345 x 495 x 310	1	53	125
AM15RK / AM15RE	565 x 545 x 442	515 x 495 x 310	1	79	155
AM20RK / AM20RE	735 x 545 x 442	685 x 495 x 310	1	105	185
AM25RK / AM25RE	905 x 545 x 442	855 x 495 x 310	2	131	215
AM30RK / AM30RE	1075 x 545 x 442	1025 x 495 x 310	2	157	245
AM35RK / AM35RE	1245 x 545 x 442	1195 x 495 x 310	3	183	280
AM40RK / AM40RE	1415 x 545 x 442	1365 x 495 x 310	3	209	310

SH = Shelf

## [ Equipment options ]

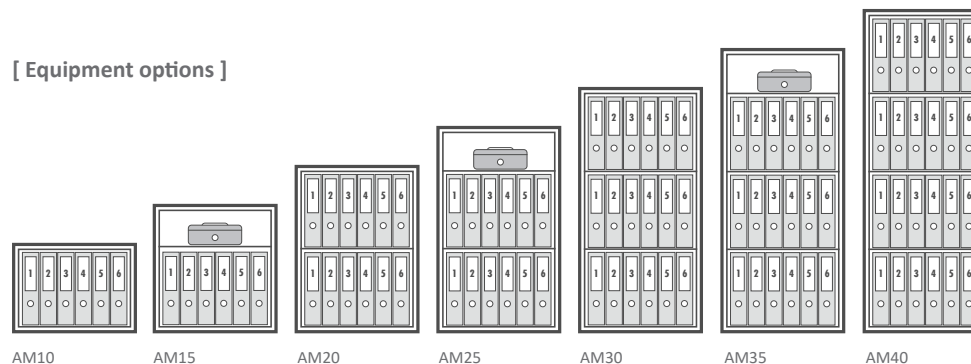



 EN1143-1  
Burglary protection

 VdS  
Grade II


 ECB-S  
Grade II

 Vso  
Class EN 2

 A2P  
Class II E

 DIN  
4102 (light fire protection)

 Domestic insurable  
up to EUR 100.000

 Commercial insurable  
up to EUR 50.000

Insured amounts  
page 04

Fig. Safe BG20, hinge right  
K-Lock Cawi 2 keys (95 mm), 1 lockable drawer, 1 drawer, 1 shelf

Model	Outside dimensions h x w x d (mm)	Inside dimensions h x w x d (mm)	SH	Volume (l)	Weight (appr. kg)
BG10RK / BG10RE	395 x 450 x 442	345 x 400 x 310	1	43	120
BG15RK / BG15RE	565 x 450 x 442	515 x 400 x 310	1	64	150
BG20RK / BG20RE	735 x 450 x 442	685 x 400 x 310	1	85	180
BG25RK / BG25RE	905 x 450 x 442	855 x 400 x 310	2	106	215
BG30RK / BG30RE	1075 x 450 x 442	1025 x 400 x 310	2	127	245
BG35RK / BG35RE	1245 x 450 x 442	1195 x 400 x 310	3	148	280
BG40RK / BG40RE	1415 x 450 x 442	1365 x 400 x 310	3	169	310

SH = Shelf

## [ Safes ]


## [ Type BG ]

BG series safes are designed for narrow spaces. They provide space to accommodate up to 5 file folders and the option of additional locks to give dual control. Armoured, high resistant barrier material ensures a grade II classification.


### [ Product information ]

Hinge	DIN right – model designation R option: DIN left
Door opening angle	180°
Body	double-walled, filled with armoured, high resistant barrier material
Door structure	triple-walled, filled with armoured, high resistant barrier material, internal boltwork protected by sheets of hardened steel to give extra anti-drill resistance
Locking mechanism	three-way moving boltwork with large steel bolts protected by additional emergency re-locks, continuous fixed full height bolt on the hinge side
Anchoring page 45, 46	prepared for floor and rear wall anchoring anchoring bolts and shields are supplied option: additional anchoring holes (customer specifies position)
Alarm connection	VdS-certified cable channels to allow connection to a burglar alarm system (from BG15 up)
Colour	inside and outside RAL 7037 dusty grey option: special colour according to RAL
Lock page 42, 43	model designation K – double-bit lock VdS class 1, Cawi 2 keys (95 mm) model designation E – electronic lock VdS class 2, M-Locks EM3520 option: other lock models (primary lock or possible secondary locks)
Equipment page 44	shelf adjustable (height setting 85 mm) option: additional shelf, inside locker, drawer, pull-out shelf, key rack
Accessories page 45	option: certified steel plinth to raise the level of the safe, fire protection door rebate seals, alarm switch set (from BG15 up), interior lighting

### [ Equipment options ]

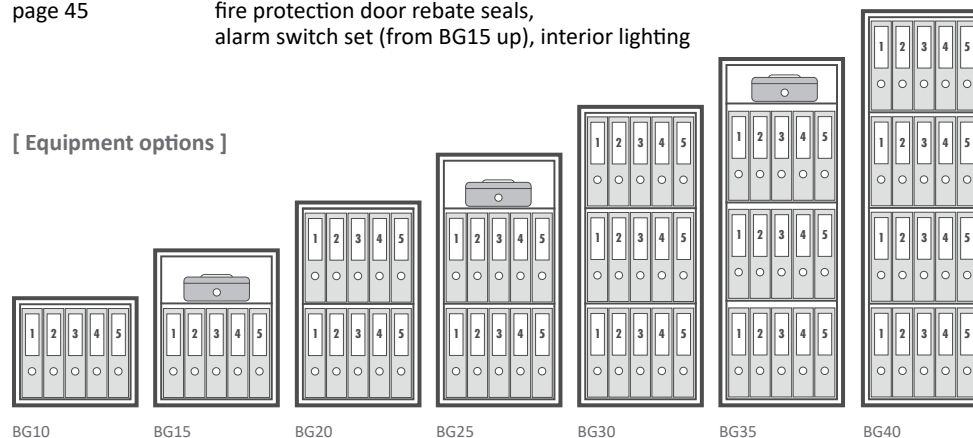



 EN1143-1  
Burglary protection

 VdS  
Grade II


 ECB-S  
Grade II

 VSO  
Class EN 2

 A2P  
Class II E

 DIN  
4102 (light fire protection)

 Domestic insurable  
up to EUR 100.000

 Commercial insurable  
up to EUR 50.000

Insured amounts  
page 04

## [ Safes ]

## [ Type BM ]

BM series safes offer lots of space and the option of additional locks to give dual control. All models are pre-fitted to enable connection to a burglar alarm system. Armoured, high resistant barrier material ensures a grade II classification.

### [ Product information ]

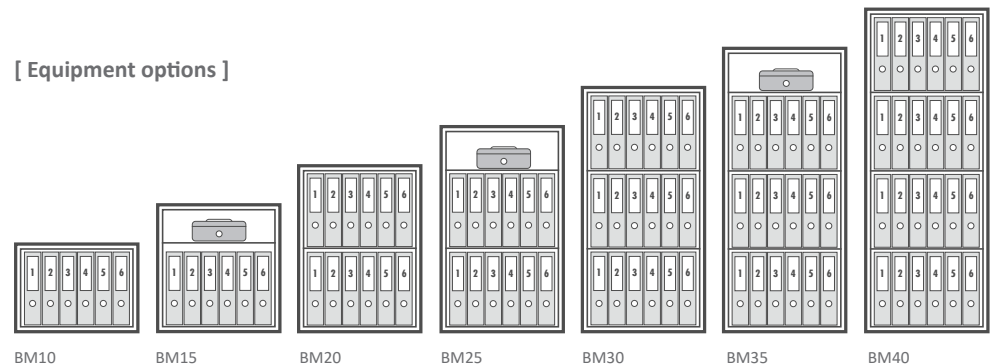
Hinge	DIN right – model designation R option: DIN left
Door opening angle	180°
Body	double-walled, filled with armoured, high resistant barrier material
Door structure	triple-walled, filled with armoured, high resistant barrier material, internal boltwork protected by sheets of hardened steel to give extra anti-drill resistance
Locking mechanism	three-way moving boltwork with large steel bolts protected by additional emergency re-lockers, continuous fixed full height bolt on the hinge side
Anchoring page 45, 46	prepared for floor and rear wall anchoring anchoring bolts and shields are supplied option: additional anchoring holes (customer specifies position)
Alarm connection	VdS-certified cable channels to allow connection to a burglar alarm system
Colour	inside and outside RAL 7037 dusty grey option: special colour according to RAL
Lock page 42, 43	model designation K – double-bit lock VdS class 1, Cawi 2 keys (95 mm) model designation E – electronic lock VdS class 2, M-Locks EM3520 option: other lock models (primary lock or possible secondary locks)
Equipment page 44	shelf adjustable (height setting 85 mm) option: additional shelf, inside locker, drawer, pull-out shelf, key rack
Accessories page 45	option: certified steel plinth to raise the level of the safe, fire protection door rebate seals, alarm switch set, interior lighting

Fig. Safe BM35, hinge right  
E-Lock M-Locks EM3520, 1 inside locker, 2 pull-out shelves, 1 shelf







Model	Outside dimensions h x w x d (mm)	Inside dimensions h x w x d (mm)	SH	Volume (l)	Weight (appr. kg)
BM10RK / BM10RE	395 x 545 x 442	345 x 495 x 310	1	53	135
BM15RK / BM15RE	565 x 545 x 442	515 x 495 x 310	1	79	170
BM20RK / BM20RE	735 x 545 x 442	685 x 495 x 310	1	105	205
BM25RK / BM25RE	905 x 545 x 442	855 x 495 x 310	2	131	240
BM30RK / BM30RE	1075 x 545 x 442	1025 x 495 x 310	2	157	275
BM35RK / BM35RE	1245 x 545 x 442	1195 x 495 x 310	3	183	310
BM40RK / BM40RE	1415 x 545 x 442	1365 x 495 x 310	3	209	345



SH = Shelf

### [ Equipment options ]





-  EN1143-1  
Burglary protection
-  VdS  
Grade III
-  ECB-S  
Grade III
-  VSO  
Class EN 3
-  RAB  
Class III E
-  DIN  
4102 (light fire protection)

-  Domestic insurable  
up to EUR 200.000
-  Commercial insurable  
up to EUR 100.000

Insured amounts  
page 04

## [ Safes ]

## [ Type CM ]

CM series safes fulfil all specifications required of the resistance grade III with minimal exterior dimensions. They offer the option of additional locks to give dual control and all models are pre-fitted to enable connection to a burglar alarm system.

### [ Product information ]

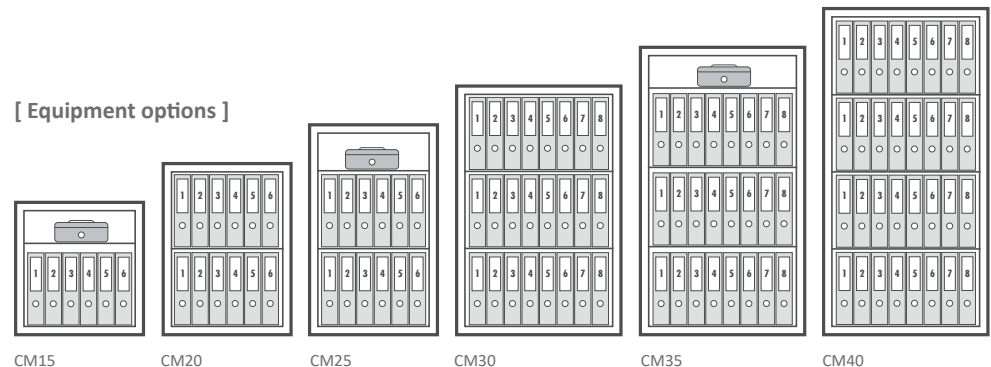
- Hinge DIN right – model designation R  
option: DIN left
- Door opening angle 180°
- Body double-walled, reinforced, filled with armoured, high resistant barrier material
- Door structure triple-walled, reinforced, filled with armoured, high resistant barrier material, internal boltwork protected by sheets of hardened steel to give extra anti-drill resistance
- Locking mechanism boltwork with large steel bolts, protected by additional emergency re-lockers, continuous fixed full height bolt on the hinge side
- Anchoring prepared for floor and rear wall anchoring  
page 45, 46  
anchoring bolts and shields are supplied  
option: additional anchoring holes (customer specifies position)
- Alarm connection VdS-certified cable channels to allow connection to a burglar alarm system
- Colour inside and outside RAL 7037 dusty grey  
option: special colour according to RAL
- Lock model designation K – double-bit lock VdS class 2, S+G 2 keys (140 mm)  
page 42, 43  
model designation E – electronic lock VdS class 2, M-Locks EM3520  
option: other lock models (primary lock or possible secondary locks)
- Equipment shelf adjustable (height setting 85 mm)  
page 44  
option: additional shelf, inside locker, drawer, pull-out shelf, key rack
- Accessories option: certified steel plinth to raise the level of the safe,  
page 45  
fire protection door rebate seals, alarm switch set, interior lighting

Fig. Safe CM30, hinge right  
K-Lock S+G 2 keys (140 mm), 1 lockable drawer, 1 drawer, 1 pull-out shelf, 1 shelf







Model	Outside dimensions h x w x d (mm)	Inside dimensions h x w x d (mm)	SH	Volume (l)	Weight (appr. kg)
CM15RK / CM15RE	595 x 575 x 495	515 x 495 x 310	1	79	280
CM20RK / CM20RE	765 x 575 x 495	685 x 495 x 310	1	105	335
CM25RK / CM25RE	935 x 575 x 495	855 x 495 x 310	2	131	390
CM30RK / CM30RE	1105 x 735 x 555	1025 x 655 x 370	2	248	565
CM35RK / CM35RE	1275 x 735 x 555	1195 x 655 x 370	3	290	635
CM40RK / CM40RE	1445 x 735 x 555	1365 x 655 x 370	3	331	705



SH = Shelf

### [ Equipment options ]





-  EN1143-1  
Burglary protection
-  EN15659  
Fire protection (option)
-  VdS  
Grade IV
-  ECB-S  
Grade IV  
+ LFS60P (option)
-  VSO  
Class EN 4
-  DIN  
4102 (light fire protection)

-  Domestic insurable  
up to EUR 400.000
-  Commercial insurable  
up to EUR 150.000

Insured amounts  
page 04

Fig. Safe DWS0850, hinge right  
E-Lock Kaba Paxos advance Set 1 (keypad) + Set 5, 1 shelf

Model	Outside dimensions		Inside dimensions		SH	Volume	Weight
	h x w x d (mm)		h x w x d (mm)			(l)	(appr. kg)
DWS0849R	848 x	645 x 565	695 x	495 x 320	1	110	635
DWS0850R	848 x	810 x 725	695 x	660 x 480	1	220	875
DWS1000R	1003 x	810 x 725	850 x	660 x 480	2	269	1030
DWS1200R	1193 x	810 x 725	1040 x	660 x 480	2	329	1150
DWS1600R	1538 x	810 x 725	1385 x	660 x 480	3	439	1405
DWS1901R	1883 x	810 x 725	1730 x	660 x 480	4	548	1680
DWS1903R	1883 x	1110 x 725	1730 x	960 x 480	4	797	2090
DWS1902	1883 x	1110 x 725	1730 x	960 x 480	4	797	2130
DWS1904	1883 x	1415 x 725	1730 x	1265 x 480	4	1050	2550

SH = Shelf

Please add 60 mm to the listed outside depth for mountings.

## [ Safes ]

## [ Type DWS ]

A distinctive feature of the DWS series safes is their solid construction plus their size (DWS 1902 and DWS1904 double-doored) and they are available with optional fire protection – tested and certified in grade LFS60P. Safes weighing less than 1.000 kg must be anchored.


## [ Product information ]


- Hinge DIN right – model designation R (DWS1902, DWS1904 double-doored)  
option: DIN left
- Door opening angle 180°
- Body double-walled, reinforced, filled with armoured, high resistant barrier material
- Door structure triple-walled, reinforced, filled with armoured, high resistant barrier material,  
internal boltwork protected by sheets of hardened steel  
to give extra anti-drill resistance
- Locking mechanism three-way moving boltwork with large steel bolts,  
protected by glass plate with additional emergency re-lockers,  
fix engaging steel bolts on the hinge side
- Anchoring fitted for floor anchoring  
page 45, 46  
anchoring bolts and shields are supplied for DWS0849, DWS0850  
option: additional anchoring holes (customer specifies position)
- Alarm connection VdS-certified cable channels to allow connection to a burglar alarm system
- Colour outside RAL 7035 light grey + RAL 7045 tele grey1, inside RAL 7035 light grey  
option: special colour according to RAL
- Lock safes in grades IV and higher have to be equipped with at least 2 certified locks  
page 42, 43  
any set of locks (from VdS class 2 up) is possible
- Equipment shelf adjustable (height setting 69 mm, DWS0849 60 mm)  
page 44  
option: additional shelf, inside locker  
option (from DWS0850 up): drawer, pull-out shelf
- Accessories option: fire protection door rebate seals, alarm switch set, interior lighting  
page 45
- Option additional certified fire protection LFS60P – except models:  
DWS0849, DWS1902, DWS1904  
bolted version – assembly on site  
from Model DWS1000 up (not possible in combination with certified fire  
protection)

## [ Equipment options ]





 EN1143-1  
Burglary protection


 EN15659  
Fire protection (option)


 VdS  
Grade V

 ECB-S  
Grade V  
+ LFS60P (option)

 VSO  
Class EN 5

 DIN  
4102 (light fire protection)

 Domestic insurable  
by arrangement

 Commercial insurable  
up to EUR 250.000

Insured amounts  
page 04

Fig. Safe EWS1000, hinge right  
2 x K-Lock S+G adjustable each 1 key guide tube 2 bits, 2 shelves

Model	Outside dimensions h x w x d (mm)	Inside dimensions h x w x d (mm)	SH	Volume (l)	Weight (appr. kg)
EWS0849R	848 x 645 x 565	695 x 495 x 320	1	110	665
EWS0850R	848 x 810 x 725	695 x 660 x 480	1	220	935
EWS1000R	1003 x 810 x 725	850 x 660 x 480	2	269	1060
EWS1200R	1193 x 810 x 725	1040 x 660 x 480	2	329	1220
EWS1600R	1538 x 810 x 725	1385 x 660 x 480	3	439	1505
EWS1901R	1883 x 810 x 725	1730 x 660 x 480	4	548	1790
EWS1903R	1883 x 1110 x 725	1730 x 960 x 480	4	797	2230
EWS1902	1883 x 1110 x 725	1730 x 960 x 480	4	797	2270
EWS1904	1883 x 1415 x 725	1730 x 1265 x 480	4	1050	2720

SH = Shelf

Please add 60 mm to the listed outside depth for mountings.

## [ Safes ]

## [ Type EWS ]

EWS series safes are designed for total protection and offer Wertheim's usual level of high security. They are available with optional fire protection – tested and certified according to LFS60P. Safes weighing less than 1.000 kg must be anchored.

## [ Product information ]

Hinge	DIN right – model designation R (EWS1902, EWS1904 double-doored) option: DIN left
Door opening angle	180°
Body	double-walled, reinforced, filled with armoured, high resistant barrier material
Door structure	triple-walled, reinforced, filled with armoured, high resistant barrier material, internal boltwork protected by sheets of hardened steel to give extra anti-drill resistance
Locking mechanism	three-way moving boltwork with large steel bolts, protected by glass plate with additional emergency re-lockers, fix engaging steel bolts on the hinge side
Anchoring page 45, 46	fitted for floor anchoring anchoring bolts and shields are supplied for EWS0849, EWS0850 option: additional anchoring holes (customer specifies position)
Alarm connection	VdS-certified cable channels to allow connection to a burglar alarm system
Colour	outside RAL 7035 light grey + RAL 7045 tele grey1, inside RAL 7035 light grey option: special colour according to RAL
Lock page 42, 43	safes in grades IV and higher have to be equipped with at least 2 certified locks any set of locks (from VdS class 2 up) is possible
Equipment page 44	shelf adjustable (height setting 69 mm, EWS0849 60 mm) option: additional shelf, inside locker option (from EWS0850 up): drawer, pull-out shelf
Accessories page 45	option: fire protection door rebate seals, alarm switch set, interior lighting
Option	additional certified fire protection LFS60P – except models: EWS0849, EWS1902, EWS1904 bolted version – assembly on site from Model EWS1000 up (not possible in combination with certified fire protection)

## [ Equipment options ]

